






## Features:

- Solid, flexible & reliable 8.4" LCD for demanding applications
- Designed for Industrial application
- long life design for OEMs and projects
- Optional S-Video/Composite inputs for AV Applications
- Optional protective Glass or touch screen for your applications
- Low power consumption saves energy
- Convenient one stop service for all components

## Specifications:

<b>Size</b>	8.4"
<b>Type</b>	VGA(SVGA, XGA, OPTIOAL) TFT LCD
<b>Pixel Pitch</b>	0.267 (H) x 0.267 (V)
<b>Viewing Angle</b>	110degrees (H) 50 degrees (V)
<b>Contrast Ratio</b>	250:1(min)
<b>Brightness</b>	400 cd/m <sup>2</sup>
<b>Display Colours</b>	262,144
<b>Colour Filter</b>	RGB Vertical Stripe
<b>Glass Surface</b>	Anti-Glare hard coat
<b>Display Area</b>	170.9 mm x 128.2mm
<b>Audio Out</b>	optional
<b>Max Resolution</b>	800x600@60 Hz, 75Hz
<b>Universal Power</b>	Yes, 100-240V, 50~60Hz
<b>Power Management</b>	Yes, VESA DPMS
<b>User Controls</b>	Power, Auto Adjust Key, Brightness ± Contrast ± Menu, Contrast, Exit phase.....
<b>Inputs</b>	VGA
<b>Optional inputs</b>	S-Video, Composite
<b>Power Consumption</b>	15w
<b>TouchScreen Options</b>	USB type Resistive (Optional)
<b>Available</b>	
<b>Dimensions</b>	156.4 (H) x 246.1(W) x 33.5(D)mm
<b>Net Weight</b>	1.1Kg
<b>Operating Temperature</b>	0°-50°C
<b>Storage Temperature</b>	-20°-60°C

## Mechanical Drawing:

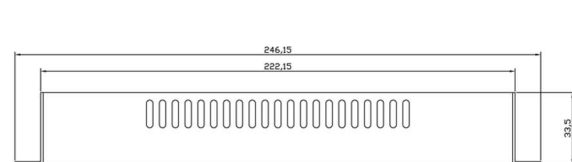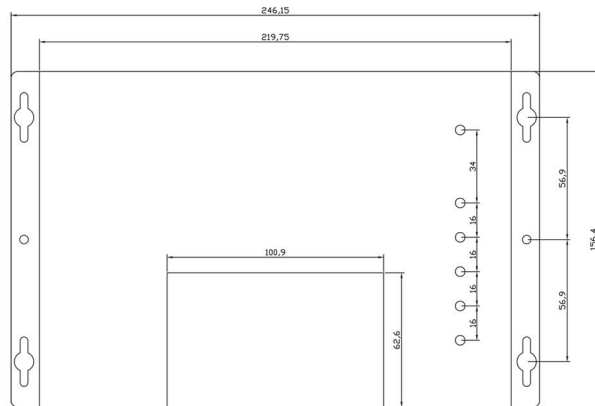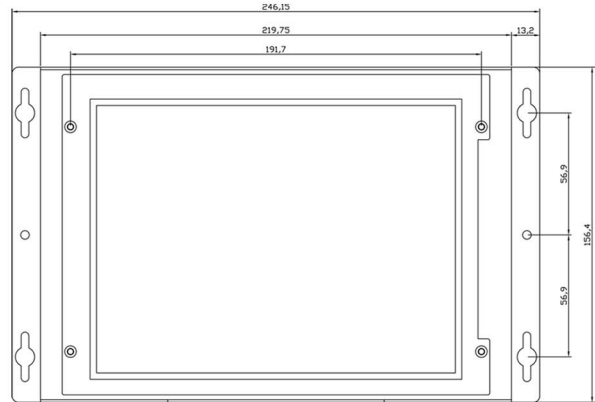

*Mechanic could be modified according to your demand!!!*

